

QUARRY & MINING VIBRATOR RANGE



ELECTRIC MOTOVIBRATORS BUILT TO LAST IN THE HARSHTEST OF ENVIRONMENTS

APPLICATIONS:


- studied for vibrating screens, feeders and similar equipment

RANGE:

- available up to 26,000 Kg Force
- 4, 6 and 8 pole models
- 50 Hz - 400 V and 500 V
- 60 Hz - 460 V and 575 V

BENEFITS:

- ex-stock delivery
- excellent price-performance ratio
- engineered to highest world standards
- two year warranty

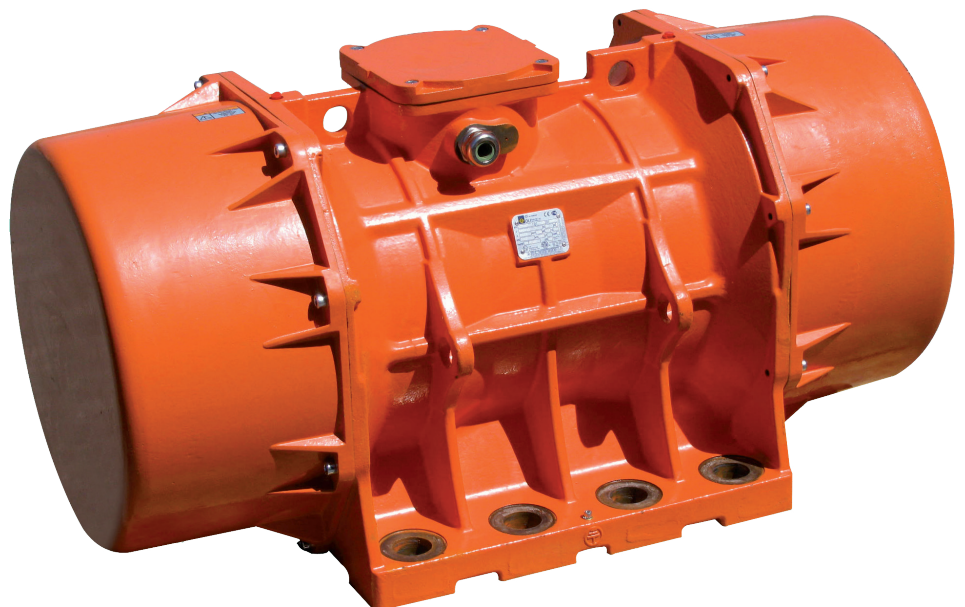

*When you need it
Where you need it*



| 4 POLES | SIZE | TYPE | | MECHANICAL FEATURES | | | | ELECTRIC FEATURES | | | |
|---------|------|--------------|--------------|-------------------------|-------|----------|-------|-------------------|-------|----------------------|-------|
| | | | | Working moment Kg*cm | | FC Kg | | Power Kw | | Current A max (Y) | |
| | | 1500 Rpm | 1800 Rpm | | | | | | | 400 V | 460 V |
| | | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| | 100 | MVE 11500/15 | MVE 11500/18 | 939 | 655 | 11799 | 11853 | 10 | 10,5 | 17,5 | 15,5 |
| | 100 | MVE 14500/15 | MVE 14500/18 | 1142 | 837 | 14352 | 15153 | 11 | 12 | 20 | 20 |

| 6 POLES | SIZE | TYPE | | MECHANICAL FEATURES | | | | ELECTRIC FEATURES | | | |
|---------|------|-------------|--------------|-------------------------|-------|----------|-------|-------------------|-------|----------------------|-------|
| | | | | Working moment Kg*cm | | FC Kg | | Power Kw | | Current A max (Y) | |
| | | 1000 Rpm | 1200 Rpm | | | | | | | 400 V | 460 V |
| | | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| | 100 | MVE 12000/1 | MVE 12000/12 | 2253 | 1550 | 12580 | 12466 | 9 | 9,5 | 16 | 15 |
| | 105 | MVE 15000/1 | MVE 15000/12 | 2634 | 1856 | 14706 | 14923 | 10,5 | 11 | 19 | 18 |
| | 105 | MVE 17500/1 | MVE 17500/12 | 3220 | 2147 | 17980 | 17264 | 13 | 13,5 | 24 | 23 |
| | 105 | MVE 19500/1 | MVE 19500/12 | 3632 | 2525 | 20285 | 20299 | 14 | 14,5 | 25 | 24 |
| | 110 | MVE 22000/1 | MVE 22000/12 | 4067 | 2622 | 22711 | 21079 | 16,5 | 16,3 | 32 | 28 |
| | 110 | MVE 25000/1 | MVE 25000/12 | 4572 | 3163 | 25532 | 25432 | 16,5 | 16,3 | 32 | 28 |

| 8 POLES | SIZE | TYPE | | MECHANICAL FEATURES | | | | ELECTRIC FEATURES | | | |
|---------|------|---------------|---------------|-------------------------|-------|----------|-------|-------------------|-------|----------------------|-------|
| | | | | Working moment Kg*cm | | FC Kg | | Power Kw | | Current A max (Y) | |
| | | 750 Rpm | 900 Rpm | | | | | | | 400 V | 460 V |
| | | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz | 50 Hz | 60 Hz |
| | 100 | MVE 12000/075 | MVE 12000/090 | 2835 | 2553 | 8904 | 11546 | 7,5 | 8 | 14 | 13,5 |
| | 105 | MVE 14000/075 | MVE 14000/090 | 3713 | 3220 | 11661 | 14563 | 9,2 | 9,5 | 21 | 19 |
| | 105 | MVE 17000/075 | MVE 17000/090 | 4401 | 3920 | 13822 | 17729 | 10,5 | 11 | 22 | 20 |
| | 110 | MVE 22000/075 | MVE 22000/090 | 5857 | 4999 | 18395 | 22610 | 12,5 | 16 | 26 | 28 |
| | 110 | - | MVE 26000/090 | - | 5857 | - | 26489 | - | 16 | - | 28 |